

Installation of the Encoder Unit

- Step 1 Turn OFF the printer power source.
- Step 2 Remove RIGHT-COVER. (Remove 2 x M-4 screws)
- Step 3 Take the screw off to take out a slide for a card rejected .
- Step 4 Insert the ENCODER into the encoder space of the printer with connecting the two harnesses from the printer.
- Step 5 Fix the ENCODER with the screw of which was removed in Step3.
- Step 6 Put the small Exit Cover on the RIGHT-COVER with two screws.
The Exit Cover and two screws are supplied with ENCODER.
- Step 7 Put the RIGHT-COVER back to the printer and fix with 2 x M-4 screws




Step 3



Step 4



Step 5

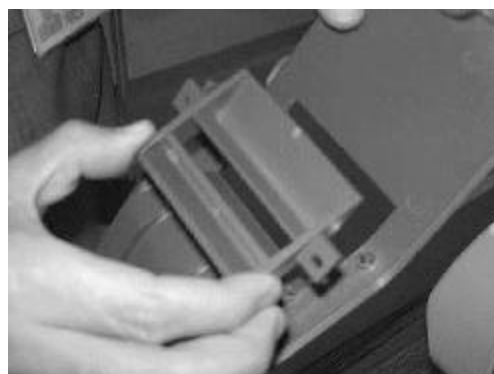

Step 6